HIGHLY EFFICIENT ENCODING SYSTEM OF PICTURE DATA

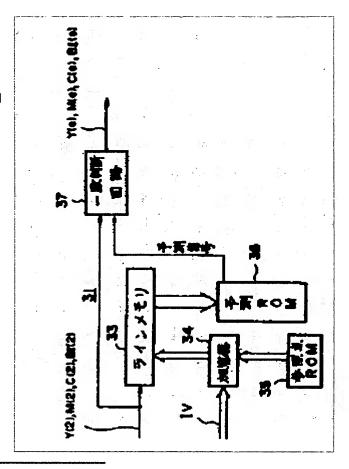|	
Patent number:	JP60012865
Publication date:	1985-01-23
Inventor:	SATOU HIROAKI
Applicant:	CANON KK
Classification:	
- International:	H04N1/41
- european:	
Application number:	JP19830118113 19830701
Priority number(s):	JP19830118113 19830701

Abstract of JP60012865

PURPOSE:To encode various matrixes in an extremely wide range by the same method by encoding these matrixes on the basis of the periodicity of the matrixes arranged two-dimensionally. CONSTITUTION:Input binary signals Y(2), M(2), C(2), Bl(2) are accumulated in a line memory 33, an address signal from a reference point ROM35 is added to an output from the ROM35 or a moving vector signal IV obtained by the transfer of a control signal by an adder 34 and the contents of the memory 33 are read out by using the added signal as an address signal. A coincidence deciding circuit 37 decides the coincidence between a forecasting signal read out from a forecasting ROM36 by using the read out contents as an address signal and the input binary signal and outputs forecasting error signals Y(e), M(e), C (e), Bl(e) as the binary signals of the coincidence or inconsistency. At the time of binary encoding, a periodically arranged dither matrix is used as a threshold and a reference picture element is determined in accordance with the periodical arrangement of the dither matrix.

Family list
3 family member for:
JP60012865
Derived from 1 application.

1 HIGHLY EFFICIENT ENCODING SYSTEM OF PICTURE DATA
    Publication info: **JP1786395C C** - 1993-08-31
                   JP4078068B B - 1992-12-10
                   JP60012865 A - 1985-01-23

Data supplied from the *esp@cenet* database - Worldwide